


Coloured light control unit EMOTEC C55


- Casing: injection moulded plastic upper and lower part
- Control buttons: raised, with epoxy abrasion protection
- Display: LED display
- Operation modes: manual or automatic coloured light selection
- In automatic operation:
 - Colour sequence: red - red/yellow - yellow - yellow/green - green - green/blue - blue - blue/red
 - Single colour duration: adjustable from 1 - 10 minutes
 - Mixed colour duration: 10 seconds, adjustable to single colour duration



Connection diagram

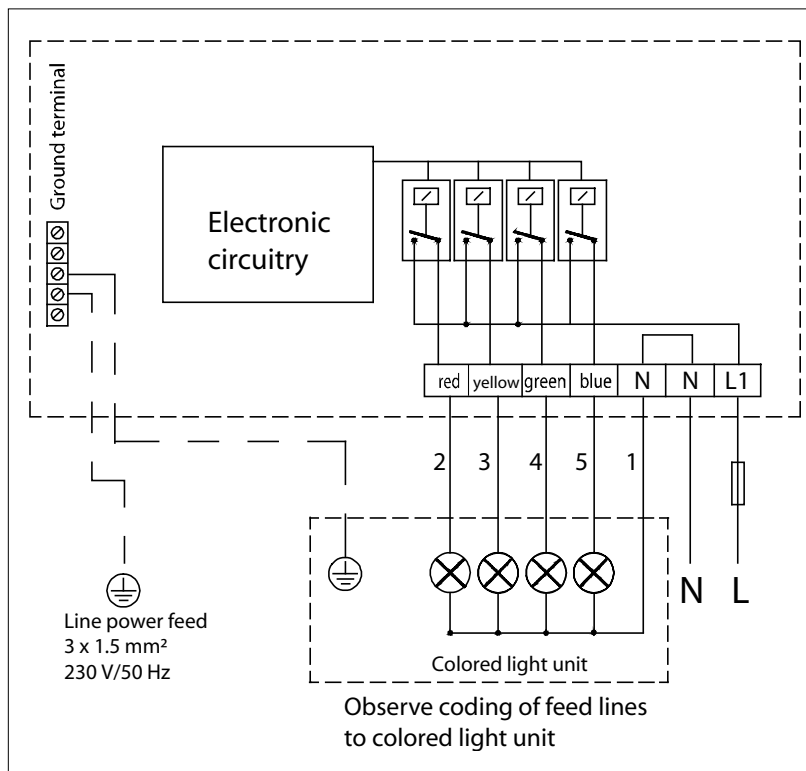

CE IPx4 AR 56
MADE IN GERMANY

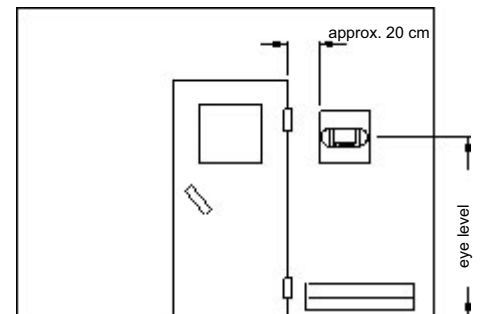

Art.-No.	electr. connection / capacity	Fuse protection	Display	Dimensions H/W/D cm	Environmental temperatures	Weight without package approx.
94.3901	230 V N AC 50 Hz max. 400 W per colour lamp	10 A	LED	24/23/7	-10°C to +40 °C	1.0 kg

Subject to technical modifications