

Sauna heater RKS

Wall mounted heater

For family sauna





Outer shell: bright high-grade steel
 Inner shell: hot-dip aluminium coated sheet
 Rear wall: hot-dip aluminium coated sheet
 Stone basket and cover: galvanized sheet steel
 Connection area: at the front
 incl. 1.2 m silicone connecting cable
 Stone filling: 15 kg incl.

Mounted on the air flow shaft which is supplied.
 Space-saving installation depth.



CE IPX4 PG
 MADE IN GERMANY

Connection diagram

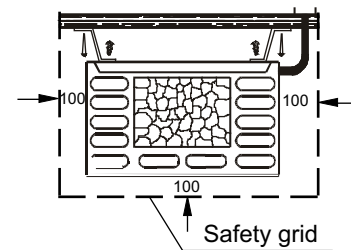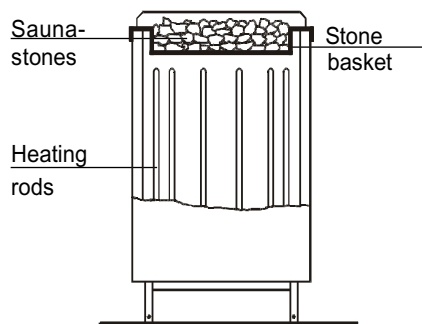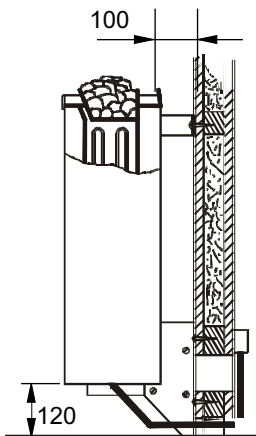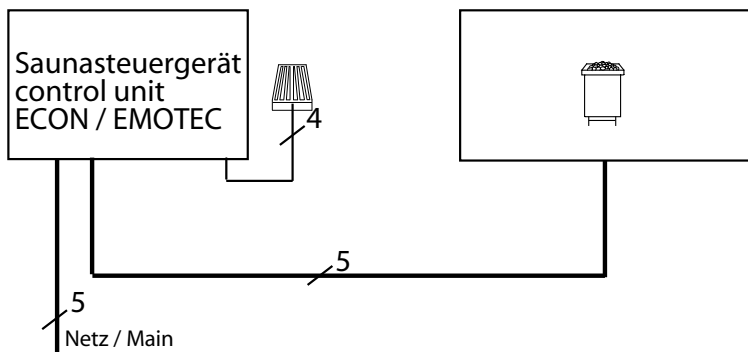

Art.-No.	Outer shell	Capacity acc. DIN	Electrical Connection	Fuse control unit in A	Installation dimensions H/W/D cm	For cabin size	Minimum dimensions of air intake and exhaust vents	Weight without stones without package	Stone filling	Connecting cable main - control unit in mm ²	Connecting cable control unit - heater in mm ²	Power switch gear (LSG) needed	For operation with control units
90.5510	high-grade steel	4 kW	3N AC 50 Hz 400 V	3 x 16	78** / 47 / 25	4 - 6 m ³	35 x 3 cm *	ca. 14 kg	15 kg	5 x 2,5	5 x 1,5	nein	ECON A1 ECON A2 ECON H2 EMOTEC B6000 EMOTEC DC9000 EMOTEC DC9000 DB/DL EMOTEC HCS 9003 EMOTEC HCS 9003 DB/DL
90.5511		6 kW				8 - 8 m ³							

All cross sections of a line are minimum diameters in mm² (Copper line)

* or in accordance with the instructions of the cabin manufacturer ** during 18 cm ground clearance

Subject to technical modifications