

## ELECTRIC SAUNA OVEN

### Typ 43.F



Outer casing in plain burnished high-alloyed steel or enamelled sheet steel in sepia conforming to RAL 8014. Fire-aluminized sheet metal inner casing in "floating" design to avoid cracking noises. Galvanized sheet steel back panel and exterior connection terminal box. Socket in suction area with integrated water drip tray. High-alloyed steel stone basket. Low surface stress on stainless and scaling free heating elements which are easily interchangeable.

Includes 15 kg unit of natural sauna stones. Wall-mounting kit for securing standing oven or wall-mounting oven included in delivery. Recommended for family saunas.



IP x4

MADE IN GERMANY

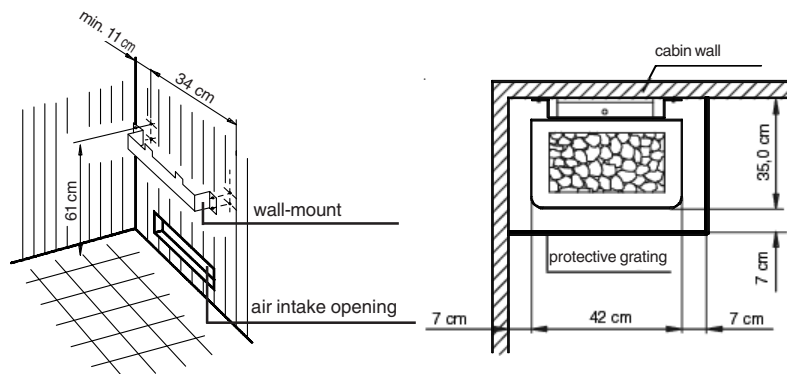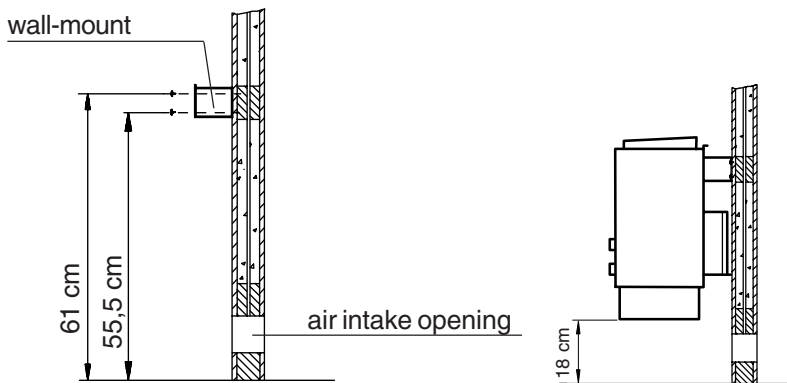

### Technische Daten

voltage: 400 V AC 3N 50 Hz  
 power consumption: 4,5; 6,0; 7,5; 9,0 kW  
 height: 710 mm, width: 420 mm, depth: 360 mm  
 stone filling: 15 kg  
 leakage current: max. 0,75 mA per kW heat output  
 Sauna oven for use in family sauna  
 Zu verwenden mit den Steuergeräten mit den for operation with control units 4415/4515, 4530 D 24, EMOTEC B 6000/D 9000

capacity	oven installation dimensions in cm	suitable for cabin volumes	minimum ventilation size	weight (excl. stones or packing)	outer casing	Art.-Nr.
4,5 kW (3x1,5 kW)	71/42/36	4 - 6 m <sup>3</sup>	je 105 cm <sup>2</sup> *	15,0 kg	anthracite with pearl effect high-alloyed steel, plain	90.8704 90.8708
6,0 kW (3x2,0 kW)	71/42/36	6 - 8 m <sup>3</sup>	je 140 cm <sup>2</sup> *	15,0 kg	anthracite with pearl effect high-alloyed steel, plain	90.8705 90.8709
7,5 kW (3x2,5 kW)	71/42/36	7 - 10 m <sup>3</sup>	je 175 cm <sup>2</sup> *	15,0 kg	anthracite with pearl effect high-alloyed steel, plain	90.8706 90.8710
9,0 kW (6x1,5 kW)	71/42/36	9 - 14 m <sup>3</sup>	je 210 cm <sup>2</sup> *	16,0 kg	anthracite with pearl effect high-alloyed steel, plain	90.8707 90.8711

\*or according to cabin producer's specification

Subject to technical modifications.