

Sauna heater Herkules XL S120 vapor Free-standing heater




For commercial sauna

Optimal heat development by well-balanced quantity of stones.
Service friendly modular construction
Two hot stone volumes allow versatile steam shocks.




CE
MADE IN GERMANY

Installation diagram

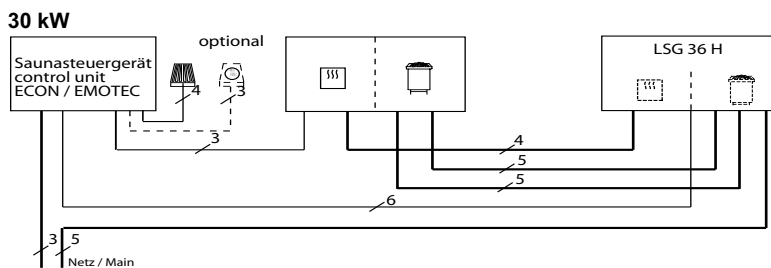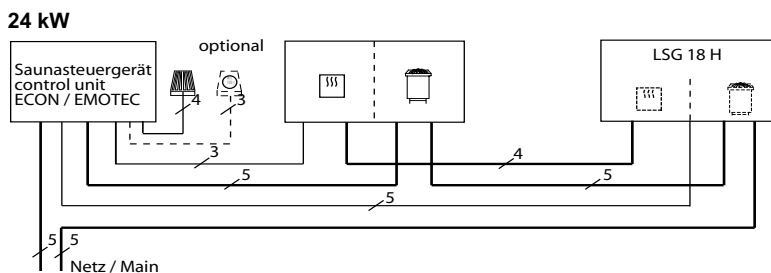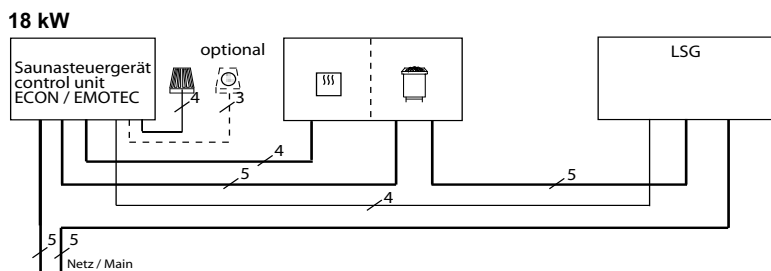

Minimum clearances **)

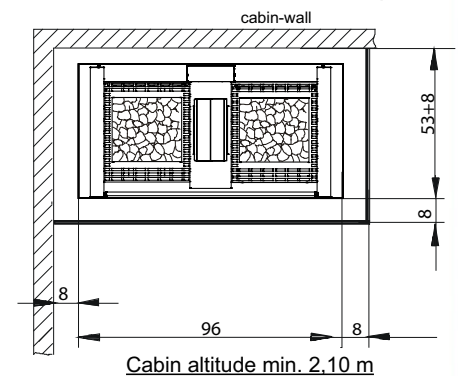

Capacity acc. DIN	Vaporizer	Electrical Connection	Fuse control unit in A	Fuse LSG in A	Connecting cable main - control unit in mm ²	Connecting cable main - LSG in mm ²	Connecting cable control unit - heater in mm ²	Connecting cable LSG - heater in mm ²	Connecting cable control unit - LSG in mm ²
18 kW	3 kW	3N AC 50 Hz 400 V	3 x 16	3 x 16	5 x 2,5	5 x 2,5	5 x 1,5 4 x 1,5	5 x 1,5	4 x 1,5
24 kW	4 kW		3 x 16	3 x 35	5 x 2,5	5 x 6	5 x 1,5 3 x 1,5	5 x 4 4 x 2,5	5 x 1,5
30 kW			1 x 16	3 x 63	3 x 1,5	5 x 16	3 x 1,5	2 St. 5 x 4 1 St. 4 x 2,5	6 x 1,5

All cross sections of a line are minimum diameters in mm² (Copper line)

To install this sauna heater is a permanent water connection (pressure < 3 bar) necessary.
The air intake vents must always be aligned behind the sauna heating unit.

Art.-No.	Outer shell	Capacity acc. DIN	Vaporizer	Installation dimensions H/W/D cm	For cabin size	Minimum dimensions of air intake and exhaust vents	Weight without stones without package	Stone filling	Power switch gear needed	For operation with control units
94.4236	Grinded stainless steel / anthracite	18 kW	3 kW	85 x 96 x 53	24 - 35 m ³	50 x 6 cm *)	ca. 85 kg	2 x 60 kg	ECON L09 EMOTEC L09	ECON H2 EMOTEC HCS 9003 EMOTEC HCS 9003 DB/DL
94.4131		24 kW	4 kW		35 - 45 m ³	50 x 8 cm *)			LSG 18H	
94.4237		30 kW			45 - 65 m ³	50 x 10 cm *)			LSG 36H	

*) or in accordance with the instructions of the cabin manufacturer

**) The wooden railing does not replace the heater protection. Depending on the individual situation of installation the cabin manufacturer must provide a suitable protection against contact.

Subject to technical modifications