


## Infrared radiator IRS 4

### for integration in the IR cabin

Casing: Electrolytic galvanised steel plate  
 Reflector: Burnished aluminium reflector  
 Covering grille: with protective flock spray  
 Assembly: horizontal or vertical,  
 no ceiling suspension

Completely premounted with 3 m silicone connecting cable  
 3 x 1.5 mm<sup>2</sup>.

#### Assembly example:

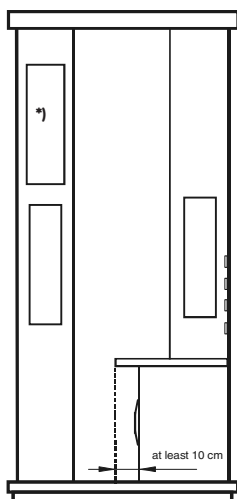


\*) assembly of a colour light appliance FL 2000 also possible.




CE BAUART GEPRÜFT  
 Typ für Hersteller: AR56  
 PCF AR56  
 MADE IN GERMANY

#### Vertical installation on cabin wall

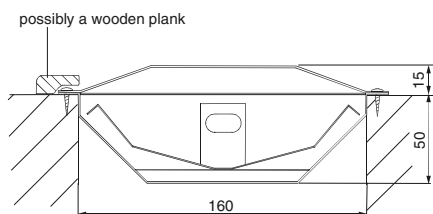

#### Vertical installation in the cabin corners

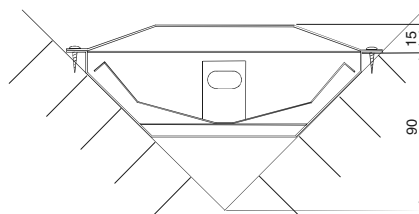

Assembly example

Art.-No.	Elektrical connection / power	Radiator	Surface temperature	Spectrum	Dimensions H/W/D [cm]	Cut-out for mounting [cm]	Weight without package	For operation with control units
94.2862	230 V N AC 50 Hz 400 W	Magnesium	400 - 600° C	2 - 10 µm IR- B, C	53/18,3/7,5	53 x 16,5	ca 2 kg	48 IR EMOTEC HIC 75 60 IR

Technical subject to change