

Infrasky 3000

Ceiling-mounted infrared heating system


Ready to use within few minutes, very small installation space requirement, simple installation, service friendly construction, modern stylish design, high efficiency, very long service life. Promotes relaxation, many positive health effects, great for sauna rest rooms and various wellness applications.

Optional accessories:

- Ceiling mounting fitting
20 cm height; item #953923 (RAL 9022); #954161 (9011)
40 cm height; item #953924 (RAL 9022); #954162 (9011)
60 cm height; item #953925 (RAL 9022); #954163 (9011)

Mains cable with fast connection plug is included. The InfraSky 3000 has to be permanent connected at 230 V.

Because of the higher starting current has the unit to be fused by a 16A circuit breaker with K characteristic.

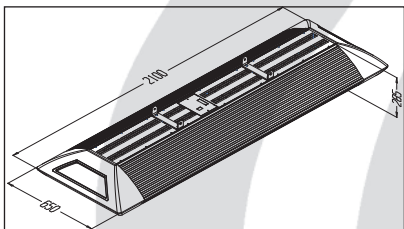


Body colour:

- RAL 9022 light grey
- RAL 9011 dark grey



CE MADE IN GERMANY

Wiring diagram

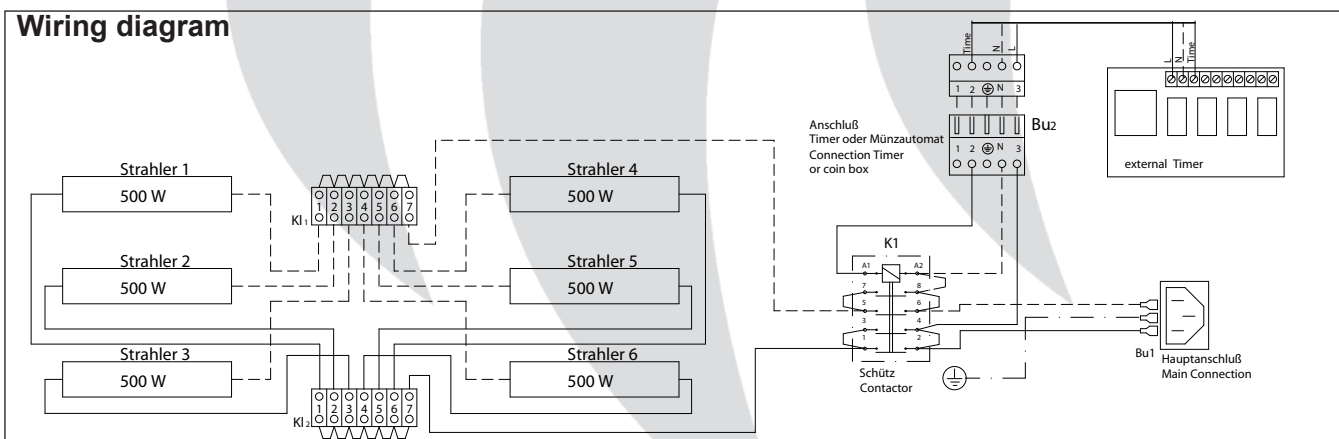

Art. no.	Power rating, output	IR radiator	No. of radiators	IR spectrum	Dimensions L/W/H [cm]	Recommended distance to body	Weight without package	Operation
94.4307 (RAL 9022) 94.4315 (RAL 9011)	230 V N AC 50 Hz 3000 W	Vitae	6 x 500 W	1,4 - 10µm IR-A IR-B IR-C	210 / 65 / 28,5	140 cm	42 kg	External control (Suntec) or coin box

Subject to technical modifications