

Saunaofen Corona S60 vapor

For commercial sauna

Free standing heater

Outer shell:

The exterior design features a striking combination of straight lines, massive yet elegant steel with the raw sauna rocks.

The internal and external shell is completely made of the best quality stainless steel.

Water container:

for approx. 8 litres

Terminal box:

high-grade steel

Stone filling:

60 kg incl.

Service friendly unit assembly system

The heating elements are mounted on a rack and may be conveniently removed without the need to remove the rocks.



Optimised ratio of radiated heat and convection due to the appropriate amount of stones.



CE IP X4

MADE IN GERMANY

Connection diagram

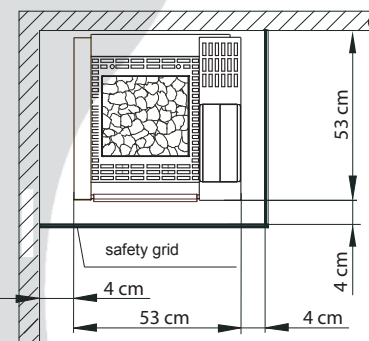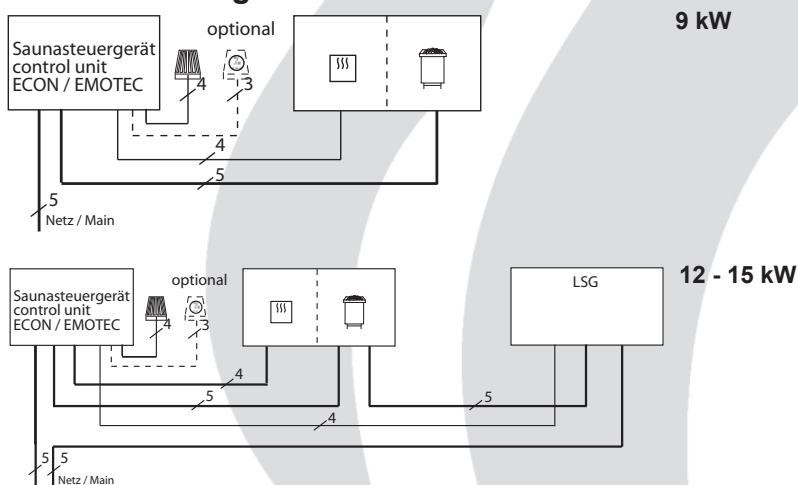

Heater power acc. to DIN	Evaporator power	Electr. connection	Control unit fuse in A	Fuses in the PCU in A	Connection mains - control unit	Connection mains - PCU	Control unit connection - heater	Connection PCU - heater	Connection control unit - PCU
9.0 kW	2.0 kW	3N AC 50 Hz 400 V	3 x 16	--	5 x 2.5	--	5 x 1.5 & 4 x 1.5	--	--
12.0 kW				3 x 16		5 x 2.5		5 x 1.5	5 x 1.5
15.0 kW				3 x 16		5 x 2.5		4 x 1.5	4 x 1.5

All information on cable diameters are minimum diameters in mm² copper line

Product no.	Outer coating	Heater power acc. to DIN	Evaporator power	Heater dimensions in cm H/W/D	For cabin volume	Minimum dimension for ventilation and bleeding	Weight without stones and packaging	Stone filling	Power control unit (PCU) required	to be used with the control units
94.4615	Polished stainless steel/anthracite	9.0 kW	2.0 kW	85 / 53 / 53	9 - 14 m ³	35 x 6 cm	approx. 78kg	60 kg	--	EMOTEC HCS 9003 EMOTEC HCS 9003 DB/DL/DLF EmoTouch II PB/AF/GF
94.4578		12.0 kW			14 - 18 m ³	35 x 7 cm				
94.4579		15.0 kW			18 - 25 m ³	35 x 9 cm				

Subject to technical modifications

