



EOS Stone S60 Vapor

Sauna heater for domestic and commercial saunas. Floor-standing model.

Exclusive sauna heater with integrated vaporizer for dry and humid sauna operation in distinctive straight-lined design with the massive soap-stone front.

Thanks to the optional rear side panel S60 models may be installed in front of glass panels or in the middle of the sauna.

The built-in vaporizer allows flexible climate forms – from dry and hot to mild and humid, herbal bath and others.

Your advantages:

- Exclusive design with the massive soap-stone front and anthracite pearl effect coated side panels.
- Integrated vaporizer for flexible climate forms.
- Large 60 kg rock store for optimal heat storage and effective water evaporation.
- Easy to service, rock store above heating elements.
- Made in Germany quality from EOS.


Specifications:

Outer shell:	Stainless steel, anthracite pearl-effect
Front:	Massive natural soap-stone
Inner shell:	Stainless steel
Rock store:	Stainless steel, above heating elements
Terminal box:	Stainless steel, recessed in rear wall
Vaporizer:	2 kW 230 V, manual filling, 8 l tank
Power range:	9.0, 12.0 and 15.0 kW
Power supply:	400 V 3N ~ 50 Hz
Dimensions:	85 x 53 x 53 cm
Stone filling:	60 kg (Sauna stones optional)
Installation:	Floor-standing




Connection diagram

9,0 kW

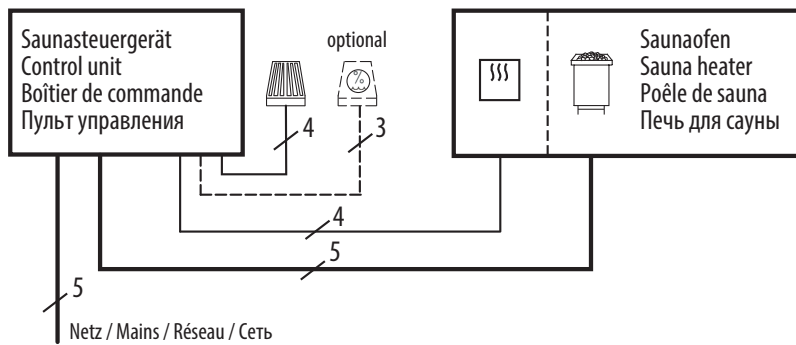

12,0 -15,0 kW

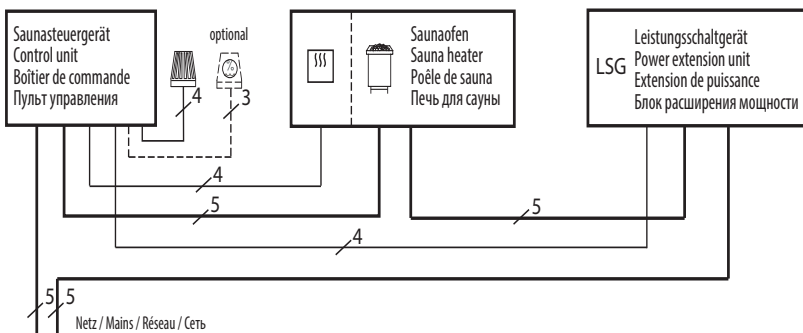


Technical specifications

Power output	Electrical connection	Connection mains - control unit	Connection control unit - heater	Connection mains - LSG	Connection LSG - heater	Connection control unit - LSG unit
9,0 kW	400 V 3N ~ 50 Hz	5 x 2,5 mm ²	5 x 1,5 mm ²	--	--	--
12,0 kW				5 x 2,5 mm ²	5 x 1,5 mm ²	4 x 1,5 mm ²
15,0 kW				5 x 2,5 mm ²	5 x 1,5 mm ²	4 x 1,5 mm ²

All cross sections of a line are minimum diameters in mm² (copper wire).

Item no.	Power output	Vaporizer	Fuse protection control unit	Fuse protection LSG unit	Dimensions H/W/D, in cm	For sauna cabin size	Min. size of air inlet and outlet	Weight without rocks	Stone filling	Power extension required
94 4617	9,0 kW	2,0 kW / 8 l tank	3 x 16 A	--	85 / 53 / 53	9 - 14 m ³	35 x 6 cm	78 kg	~60 kg	no
94 4588	12,0 kW			3 x 16 A		14 - 18 m ³	35 x 7 cm			LSG 10
94 4589	15,0 kW			3 x 16 A		18 - 25 m ³	35 x 9 cm			

Minimum clearances

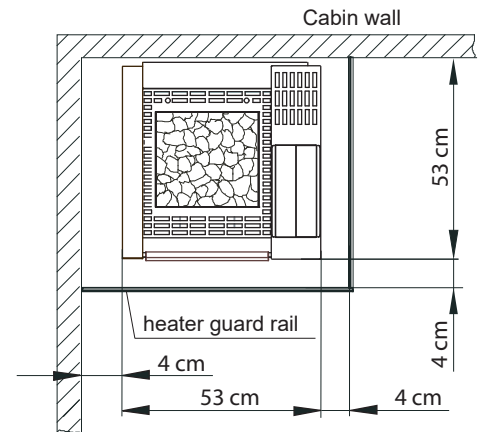

Suitable control units

Model

EOS Compact H series

EOS EmoTec H series

EOS EmoStyle H / Hi series

EOS EmoTouch 3 series

Spare heating elements

Description	Item no.
For 9.0 kW (9 x 1000 W)	2001 1599
For 12.0 kW (9 x 1333 W)	2001 1598
For 15.0 kW (9 x 1666 W)	2001 3763