

# **EOS Bi-O Thermat W**

# Sauna heater with vaporizer for domestic sauna cabins. Wall-mounting.

Universal sauna heater with integrated vaporizer - enjoy flexible sauna climate to your liking, from hot and dry to mild and steamy, herbal bath and much more. Thanks to the sleek top made of die-cast aluminium with anthracite coating Thermat heaters offer a timeless, elegant design.

#### Your advantages:

- Flexible sauna climate settings thanks to the integrate vaporizer with manual filling.
- Water level supervision with acoustic warning and cut-out by water shortage.
- Proven, durable construction with long-life heating elements.
- Optimal relation between stone volume and air convection system for fast heat-up times and powerful water infusions.
- Made in Germany quality from EOS.

### **Specifications:**

Outer shell: Steel with anthracite pearl effect pow-

der-coating (scratch-resistant), zinc-plated

rear side panel

Inner shell: Corrosion-resistant aluminium-coated steel

Top: Aluminum die-cast top, anthracite pearl

effect coated

Stone support grill: Stainless steel

Terminal box: Zinc-plated steel, corrosion-resistant

Vaporizer: 1.5 kW, 5 l tank, manual filling, with acoustic


water shortage alarm and cut-out

Power range: 6.0, 7.5 and 9.0 kWPower supply:  $400 \text{ V } 3\text{ N} \sim 50/60 \text{ Hz}$ 

Rock store volume: Approx. 15 kg (stones optionally available)

Dimensions (H x W x D): 600 x 450 x 380 mm Installation: Wall-mounted heater














## **Connection diagram**

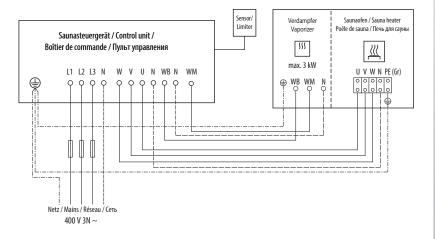

#### **Spare heating elements**


Heater / type	Heating element	Qty	Item no.	
6,0 kW	1500 W	4	2000.8085	
7,5 kW	1500 W	5	2000.8085	
9,0 kW	1500 W	6	2000.8085	
Vaporizer	1500 W	1	2001.3335	


#### **Technical specifications**

Power rating	Electic connection	Fuse protection	Connection mains - control unit	Connection control unit - sauna heater	
6,0 kW	6,0 kW 400 V 7,5 kW 3N ~ 9,0 kW 50/60 Hz	3 x 16 A	5 x 2,5 mm <sup>2</sup>		
7,5 kW				5 x 1,5 mm <sup>2</sup> (to heater) 4 x 1,5 mm <sup>2</sup> (to vaporizer)	
9,0 kW				(10 144011201)	

All cross sections of a line are minimum diameters in mm² (copper wire)

#### Minimum clearances



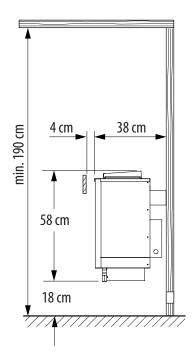

### Wichtige Hinweise:

Make sure to prove in advance the local level of water hardness.

Sauna essences should not be added directly into the water tank! Avoid operation of the vaporizer with low water level to prevent overheating. Always empty the tank after each use.

Item no.	Colour	Power rating	Vaporizer	Dimensions H/B/T, in cm	for sauna cabin size	Min. size air inlet and outlet	Weight without rocks	Stone filling	Suitable control units
94 5484	6,0 kW			6 - 8 m <sup>3</sup>	35 x 4 cm	15,5 kg		Econ H series Compact H series	
94 5485	Anthracite pearl effect finish	7,5 kW	1,5 kW 5 l	60 / 45 / 38	7 - 10 m <sup>3</sup>	35 x 5 cm	16,0 kg	ca. 15 kg	EmoTouch 3
94 5486	94 5486	9,0 kW			9 - 14 m³	35 x 6 cm	16,5 kg		

Druck-Nr.: 29344144 23.24 Technical changes reserved