



Technical data sheet

EOS Edge

Sauna heater for private sauna cabins. Floor-standing model.

Stylish sauna heater in "tower" design with open rock store on all sides for dry (Finnish) sauna.


Exclusive premium class floor-standing heater with a distinctive side wall pattern - elegant and modern.

Your advantages:

- Elegant "tower" design with well-thought construction, ensuring stable air circulation for maximum performance.
- The design can be enhanced with optional side cover panels in anthracite or matt black finish.
- Outer shell and inner cage made of polished stainless steel - for durability and reliability.
- Adjustable feet provide a secure position by uneven floors.
- Uniform appearance on all sides - great for installation in front of glass or central position.
- Up to 100 kg sauna stones ensure excellent temperature stability and heat storage reserves for powerful steam shocks and a great sauna experience.
- Made in Germany quality from EOS.

Specifications:


Outer shell:	Stainless steel
Inner cage:	Stainless steel
Terminal box:	integrated in the bottom of the heater
Power output:	6.0, 7.5, and 9.0 kW
Power supply:	400 V 3N ~ 50 Hz
Rock store volume:	approx. 100 kg (Sauna stones optionally available)
Dimensions (HxWxD):	100 x 35 x 35 cm (Adjustable feet)
Installation:	Floor-standing model

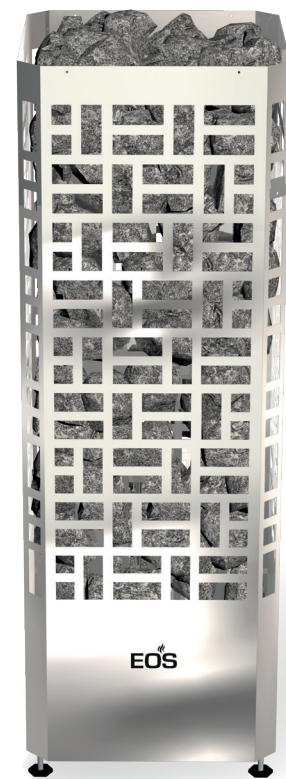


Optional side cover panels with anthracite or black finish.

Connection diagram

7,5 - 9,0 kW

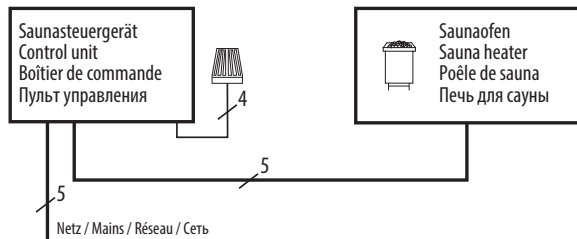

Installation example

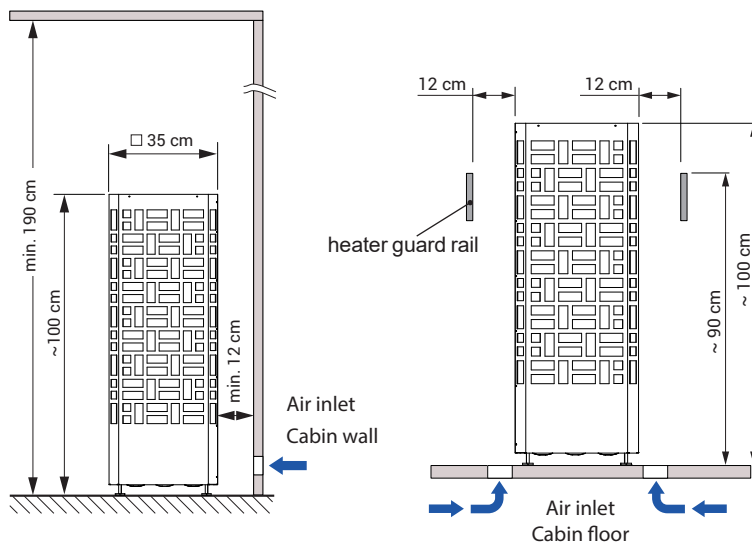

Spare heating elements


Description	Item no.
6,0 kW (6x 1000 W)	2001 0888
7,5 kW (3x 1000 W, 3x 1500 W)	2001 0888 / 0894
9,0 kW (6 x 1500 W)	2001 0894

Technical specifications


Item no.	Power output	Electrical connection	Fuse protection control unit	Connection power supply - control unit	Connection control unit - heater	Dimensions H / W / D, cm	For sauna cabin size	Min. size of air inlet and outlet	Weight without rocks	Stone filling	Power extension necessary
94 6976	6,0 kW	400 V 3N ~ 50 Hz	3 x 16 A	5 x 2,5 mm ²	5 x 1,5 mm ²	100 / 35 / 35	6 - 8 m ³	35 x 4 cm	17 kg	approx. 100 kg	no
94 6977	7,5 kW						8 - 12 m ³	35 x 5 cm			
94 6978	9,0 kW						9 - 14 m ³	35 x 6 cm			

All cross sections of a line are minimum diameters in mm² (copper wire), make sure to observe 18 cm ground clearance.

Minimum clearances

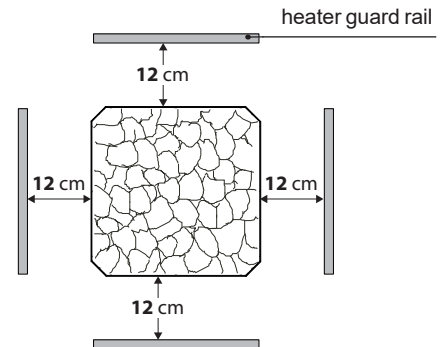

Clearances with side panels

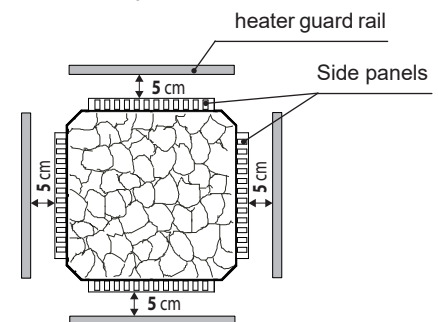

Suitable control units

Model
EOS Econ D series
EOS Compact D series
EOS EmoTec D series
EOS EmoStyle D / Hi series
EOS EmoTouch 3 series