

EOS Morpheus

Sauna heater for domestic and commercial saunas. Floor-standing model.

Luxury sauna heater for the Finnish (dry) sauna. Suits both residential and small-scale commercial sauna use.

Highlights and benefits:

- Luxurious, refined design with "Black" or alternatively "Black Brass" styling with sophisticated brass strips and feet.
- Compact footprint – only 40 x 43,7 cm.
- Innovative **Dual Heat**® technology:
A separate heating element placed inside the rock store functions independently to keep the stones at the maximum temperature for more effective water splashes.
- **PRO version:** Innovative removable rock store and heating block, which can be swapped on site in minutes without the need to disconnect or move the heater.
- Adjustable feet for secure mounting on all surfaces.
- Exclusive **Cubius** sauna stones as an option for design refinement. Available various heights and stylings.
- Made in Germany quality from EOS.

Specifications:

Outer shell:	Stainless steel, matt black finish With adjustable feet
Top:	Stainless steel, with matt black finish
Rock store:	Stainless steel, no contact with heating elements
Power range:	7.0 9.0 11.0 and 13.0 kW With EOS Dual-Heat technology
Power supply:	400 V 3N ~ 50/60 Hz
Rock store volume:	approx. 25 kg
Dimensions (HxWxD):	87,6 x 40 x 43,7 cm
Installation:	Floor-standing



„Black Brass“ design with optional Cubius stones



„Black“ design with classic diabase sauna stones



Morpheus PRO : Modular construction with removable rock store and heating block significantly reduces service and maintenance time.




IPx4 made in Germany




Connection diagram

7,0 - 9,0 kW

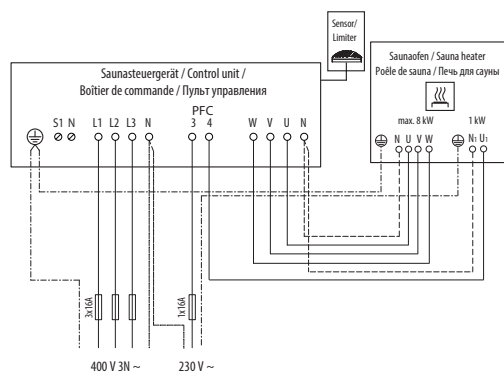

Both connection cables must be connected to the same RCD (residual current device).

11,0 - 13,0 kW

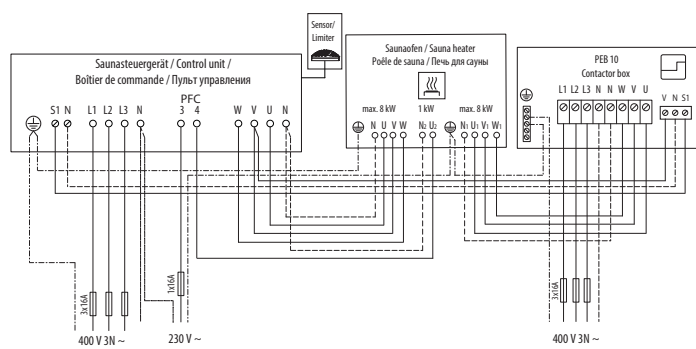

Both connection cables must be connected to the same RCD (residual current device).


Note: example for sauna control units with 10 kW capacity. Control units with 18 kW do not require PEB10 unit.

Technical specifications

Power output with Dual Heat®	Connection mains - control unit	Connection control unit - heater	Connection mains - PEB	Connection PEB - heater	Connection control unit - PEB unit
6.0 kW + 1.0 kW	1 x 5G2.5 1 x 3G2.5	1 x 5G1.5 1 x 3G1.5	—	—	—
8.0 kW + 1.0 kW					
10.0 kW + 1.0 kW					
12.0 kW + 1.0 kW			5G2.5	5G1.5	4G1.5

All cross sections of a line are minimum diameters in mm² (copper wire).

Minimum clearances

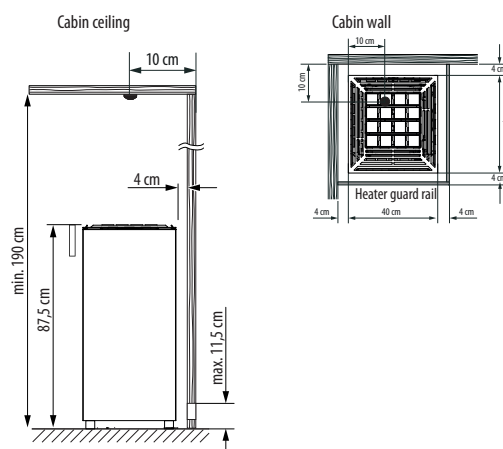

Suitable control units

Model

EOS Compact D series

EOS EmoTec D series

EOS EmoStyle D / Hi series

EOS EmoTouch 3 series

EOS U-Command series

Spare heating elements

Description	Item no.
for 6.0 kW (6 x 1000W)	2001 6809
for 8.0 kW (6 x 1500 W)	2001 5056
for 10.0 kW (6 x 1666 W)	2001 5058
for 12.0 kW (6 x 2000 W)	2001 6810
for 1.0 kW (Dual Heat®)	2001 7469

Power output with Dual Heat®	Electrical connection	Fuse protection control unit	Fuse protection PEB unit	Dimensions H/W/D, in cm	For sauna cabin size	Min. size air inlet and outlet	Weight without rocks	Stone filling	Power extension required
6.0 kW + 1.0 kW	400 V 3N ~ 50/60 Hz	3 x 16 A	—	87,6 / 40 / 43,7	7 - 10 m³	35 x 5 cm	48,5 kg	~ 25 kg	no
8.0 kW + 1.0 kW		1 x 16A			9 - 14 m³	35 x 6 cm			
10.0 kW + 1.0 kW		3 x 16 A	3 x 16 A		11 - 15 m³	35 x 6 cm			PEB 10*
12.0 kW + 1.0 kW					14 -18 m³	35 x 7 cm			

* not required for EOS Compact D18/H18 and EOS U-Command D18/H18 control units.