

Technical data sheet

EOS Mythos Vapor

External vaporizer for the EOS Mythos sauna heater series.

The vaporizer can be simply docked on both the left and right side, which gives you a maximum amount of design options. With an output of 2,0 kW or 3,0 kW, you will have a powerful steam source that you can adapt to the size of the sauna in order to create a large variety of climate forms – from hot and dry to mild and humid.

If there are two or more Mythos vaporizers in one sauna cabin, they should be ordered in a special alternative version. In the standard version only one Mythos vaporizer is allowed per sauna heater or sauna room.

Notice: The sauna heater is not included!

Your advantages:

- 2,0 kW / 3,0 kW vaporizer enables flexible climate forms.
- Can be mounted on any side (left / right / left + right) of the sauna heater EOS Mythos S35 / S45.
- Durable, long-lasting construction, all made of stainless steel.
- Slim, space-saving construction – only 37 cm depth.
- Retrofitting possible on site.
- Made in Germany quality from EOS.

Specifications:

Outer shell:	Stainless steel, with high-quality anthracite, white or matt black finish.
Power:	2,0 and 3,0 kW
Volume:	bis 10 l
Power supply:	230 V 1N ~ 50 Hz
Dimensions (HxWxD):	840 x 80 x 370 mm
Installation:	Floor-standing



Mythos S45 white Vapor:
vaporizer right white

Mythos S35 anthracite Vapor:
vaporizer left anthracite with
optional Cubius stones




Mythos S45 black Vapor:
vaporizer left + right black
with optional guard rail

Mythos S45 CRS Vapor:
vaporizer left anthracite with




Connection example

7,5 - 9,0 kW

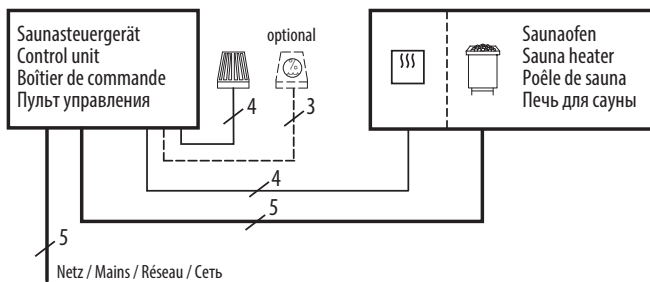


12,0 - 15,0 kW*

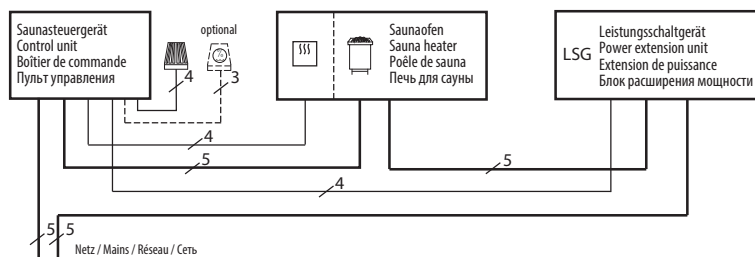

*Notice: No additional LSG power extension unit is required for the Compact H18 control unit.
Econ H1 – only for 7,5 - 9 kW models.

Installation example

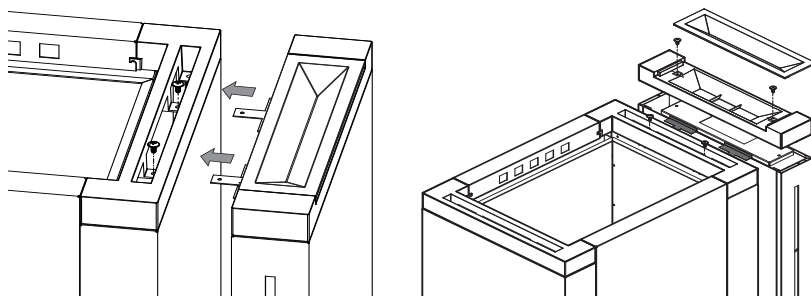

Technical specifications


Vaporizer Power	Electrical connection	Connection control unit - vaporizer	Dimensions H/W/D, in cm	Vaporizer weight, kg	Water tank volume	Steam pressure	To be used with control units
2,0 kW	230 V 1N ~ 50 Hz	5 x 1,5 mm ²	84 / 8 / 37	20,5 kg gross 13,0 kg net	10 l	0 bar pressureless	EOS Econ H (H1 only up to 9 kW), Compact H-, EmoTec H-, EmoStyle H / Hi-, EmoTouch 3-series
3,0 kW							

All cross sections of connection cables are minimum diameters in mm² (copper wire).



Druck-Nr.: 29344485 29.23

Technical changes reserved

Minimum clearances

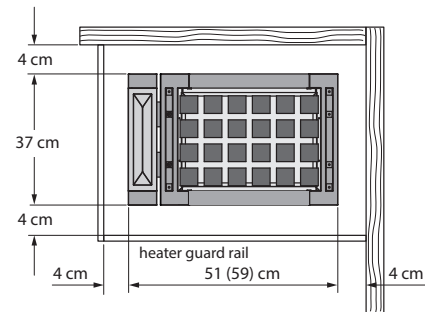

Minimal inner sauna cabin height 190 cm.

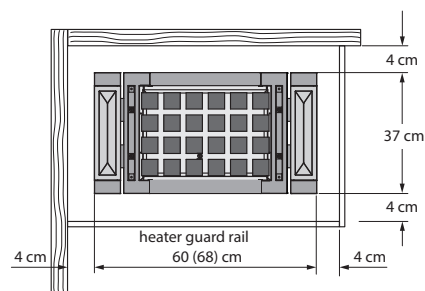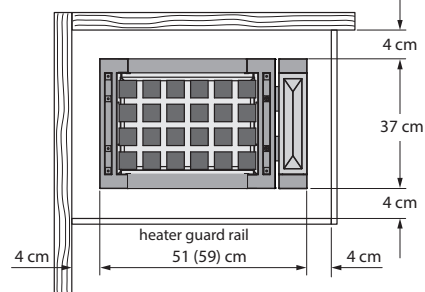

Special connection requirements for two vaporizers –
see installation and operating instructions

Spare heating elements

Description	Item no.
For 2.0 kW	2001 5061
For 3.0 kW	2001 5062