



EOS Mythos S35

Sauna heater for private and commercial saunas. Floor-standing model.


Exclusive award-winning sauna heater for the dry Finnish sauna in distinctive cubistic design with the unique pillar-alike foot. Cubius stones add the crowning touch to the outstanding design of this state-of-the-art model.

Advantages and benefits:


- Choice of different finishes: anthracite, brushed steel, matt black or white.
- Unique Cubius stones included in standard supply. Further Cubius variants, colors and heights are optionally available.
- Durable, long-lasting construction, all made of stainless steel.
- Uniform appearance on all sides, great for installation in front of glass panels.
- Large ~35 kg (77 lbs) rock store for optimal heat storage and effective water evaporation.
- Slim, space-saving construction – only 37 cm (1.2 ft) depth.
- Easy to service, rock store above heating elements.
- Made in Germany quality from EOS.

General specs:

Outer shell:	Anthracite finish (with/without brushed steel elements), white or matt black
Inner shell:	Stainless steel
Rock store:	Stainless steel, above heating elements
Terminal box:	Stainless steel, recessed design
Power range:	7.5 kW or 9.0 kW
Power supply:	240V 2PH / 208V 3PH AC 60 Hz
Dimensions:	84 x 42 x 37 cm / 2.8 x 1.4 x 1.2 ft
Stone filling:	35 kg / 77 lbs, incl. in delivery Cubius stones kit included.
Installation:	Floor-standing



Also available in matt black or white finish

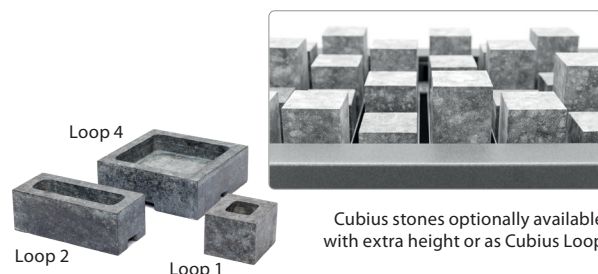


C US

IPx4

made in Germany



Wiring diagram

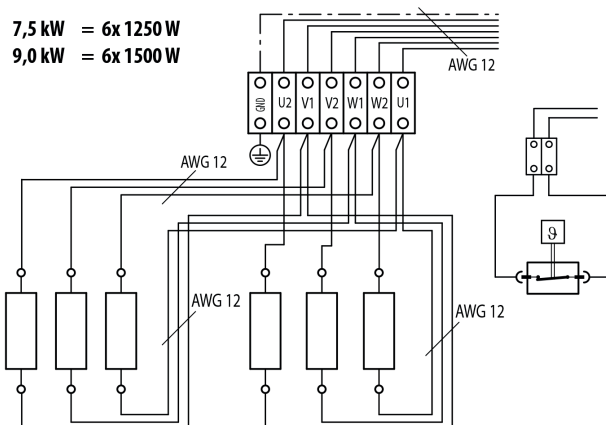

Accessories (optional)



Description	Item no.
Cubius stones, set for S35 (20 pcs. with frame)	94 5520
Cubius stones 6 cm / 0.2 ft height, 10 pcs pack	94 5627
Cubius stones 8 cm / 0.26 ft height, 10 pcs pack	94 5626
Sauna stones 20 kg / 44 lbs (10 - 15 cm / 0.3 - 0.5 ft)	94 7340
Mounting brackets for safety guard rail (4-sided), anthracite	94 8960
Mounting brackets for safety guard rail (4-sided), black	94 8961
Mounting brackets for safety guard rail (4-sided), white	94 8962

Technical specifications

Power	Electrical connection	Fuse protection (208 V / 240 V)	Connection line (208 V / 240 V)
7.5 kW	240V 2PH AC 60 Hz	50 A / 40 A	12 AWG / 10 AWG
9.0 kW	208V 3PH AC 60 Hz	35 A / 50 A	10 AWG / 8 AWG

All cross sections of connection cables are minimum diameters in mm² (copper wire).


Item no.	Power	Design*	Dimensions H/W/D	For sauna cabin size	Min. size air inlet and outlet	Weight without rocks	Stone filling	Power extension required			
94 8027	7.5 kW (208V)	Anthracite & stainless steel	84 x 42 x 37 cm 2.8 x 1.4 x 1.2 ft	4.2-6.3 qm x 1.9 m 45.2-67.8 sq ft x 6.2 ft	35 x 5 cm 1.2 x 0.2 ft	33.5 kg 74 lbs	35 kg 77 lbs	no			
94 8031	7.5 kW (240V)			4.7-7.4 qm x 1.90 m 50.5-79.7 sq ft x 6.2 ft	35 x 6 cm 1.2 x 0.2 ft						
94 8028	9.0 kW (208V)										
94 8032	9.0 kW (240V)										

*Design with anthracite, matt black or matt white finish upon request.

Druck-Nr.: 29015257 02.25

Technical changes reserved

Minimum clearances

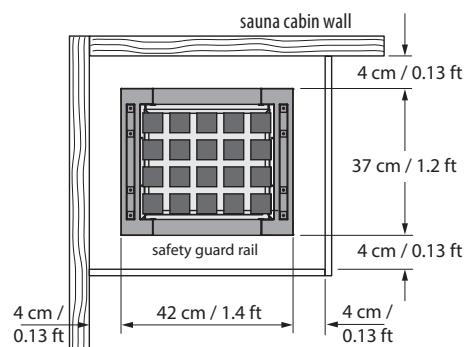

Min. inner sauna height 190 cm / 6.23 ft.

Suitable control units

Model
EOS EmoTec D/H, 208V 3N AC 60 Hz , 9.0 kW
EOS EmoTec D/H, 208V 3N AC 60 Hz , 15.0 kW
EOS EmoTec D/H, 240V 2N AC 60 Hz , 9.0 kW
EOS Touch 3, 208V 3N AC 60 Hz , 9.0 kW
EOS Touch 3, 208V 3N AC 60 Hz , 15.0 kW
EOS Touch 3, 240V 2N AC 60 Hz , 9.0 kW