



Technical data sheet

8
years
warranty*

EOS Structure

Sauna heater for private and commercial saunas. Floor-standing model.

Exclusive, luxury class sauna heater for the dry Finnish sauna. An eye catcher, a true state-of-the-art piece in any sauna.

The unique floating design with futuristic feet and abstract line styling create a modern fusion of minimalism and maximalism, turning this sauna heater to a unique "Œuvre d'art". It's extravaganza par excellence.

Advantages and benefits:

- Extravagant, futuristic design.
- Scratch-resistant matt black finish.
- Stylish Cubius stones in black finish included as standard.
- Finest craftsmanship, each piece individually crafted to order.
- Durable, thoroughly tested stainless steel construction.
- Great for central position or installation in front of glass panels.
- Guard rail already seamlessly integrated into design.
- Pre-mounted connection cable (2 lines by 12 kW).
- Exceptional 8 years warranty incl. heating elements*
- Made in Germany quality from EOS.

Specifications:

Outer shell:	Stainless steel, matt black finish
Inner shell & rock store:	Stainless steel
Feet:	Stainless steel, matt black finish
Power range:	6.0 8.0 10.0 kW 12.0 kW
Power supply:	400 V 3N ~ 50 Hz
Weight:	40 kg (without stones)
Stone volume:	~30 kg, included in delivery incl. black Cubius stones
Dimensions (H x W x D):	102 x 97 x 97 cm

* 8 years warranty by residential use and online product registration.
For full terms please refer to www.eos-sauna.com/garantiebedingungen




Example shows optional
EOSafe L reflector

CE UK
CA IPx4


Made in Germany

Connection diagram

9 - 10 kW | 12 kW*

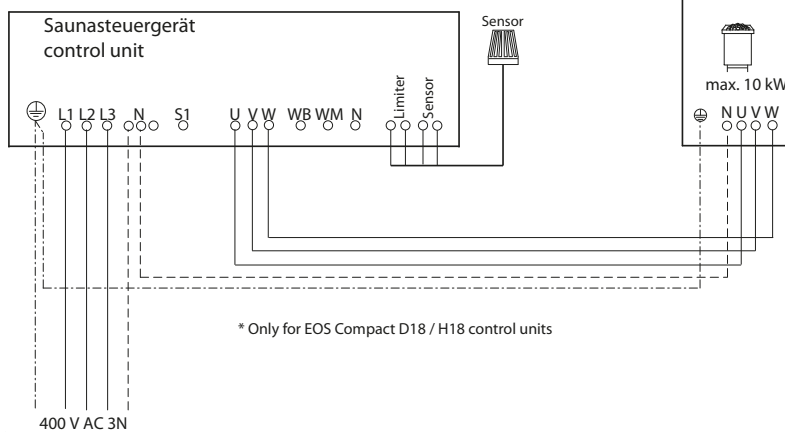

12 kW**

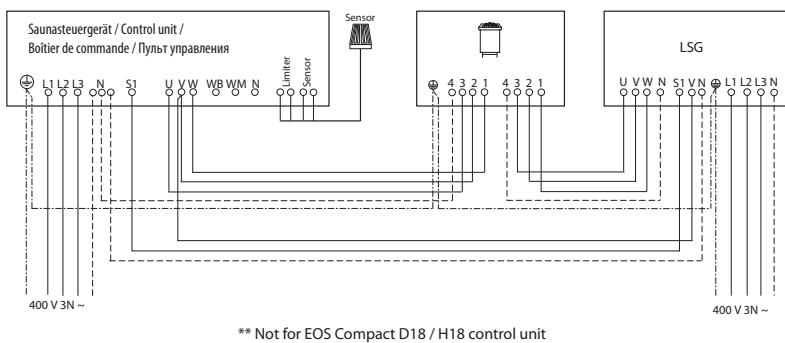


Technical specifications

Power	Electrical connection	Connection mains - control unit	Connection control unit - heater	Connection mains - LSG	Connection LSG - heater	Connection control unit - LSG unit
6.0 kW	400 V 3N ~ 50 Hz	5 x 2,5 mm ² (5 x 4 mm ² for Compact D18)	5 x 1,5 mm ² (5 x 4 mm ² for Compact D18)	—	—	—
8.0 kW						
10.0 kW						
12.0 kW				5 x 2,5 mm ²	5 x 1,5 mm ²	4 x 1,5 mm ²

All cross sections of connection cables are minimum diameters in mm² (copper wire).

Power	Fuse protection control unit	Fuse protection LSG unit	Dimensions H/W/D, in cm	For sauna cabin size	Min. size air inlet and outlet	Weight without rocks	Stone filling	Power extension	Suitable control units
6.0 kW	3 x 16 A	—	102 / 97 / 97	6 - 8 m ³	35 x 4 cm	40 kg	~30 kg, caliber 30 - 60 mm	—	Econ Compact EmoTec EmoStyle EmoTouch
8.0 kW				7 - 10 m ³	35 x 5 cm				
10.0 kW				11 - 15 m ³	35 x 6 cm				
12.0 kW	3 x 16 A (3 x 35 A bei Compact D18)	3 x 16 A		14 - 18 m ³	35 x 8 cm			LSG 10 (except Compact D18)	

Minimum clearances

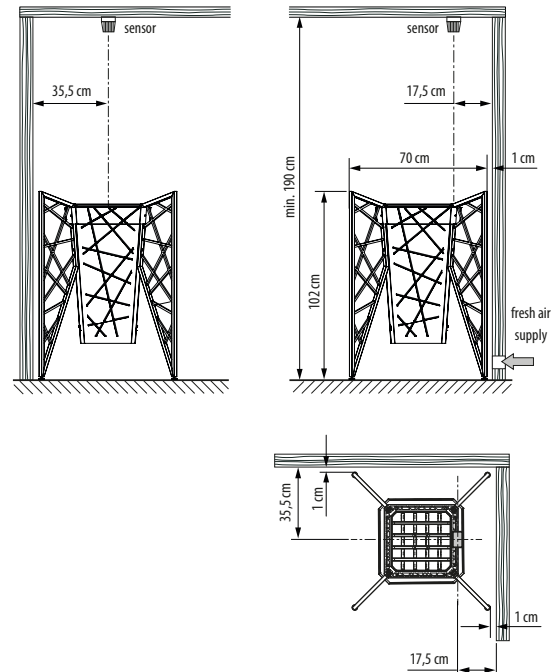

By central position make sure to provide air supply as a channel under the floor.
Cable connection - concealed through the heater foot.

Options and accessories

Description	Item no.
Sauna stones 30-60 mm, 8 kg	94 7338
Sauna stones 30-60 mm, 15 kg	94 7339
Sauna stones white 50-80 mm, 10 kg	94 7698
EOSafe L safety system	94 7151