

Sauna heater Thermo-Tec S


for domestic sauna cabins

Outer shell:	Steel with anthracite pearl effect powder-coating
Top:	Die-cast aluminium, anthracite pearl effect
Inner shell:	high-grade steel
Rear panel:	Zinc-plated steel, corrosion-resistant
Stone support grill:	Stainless steel
Terminal box:	Zinc-plated steel, corrosion-resistant
Stone filling:	18 kg, incl. in delivery

Floor-standing heater




Connection diagram

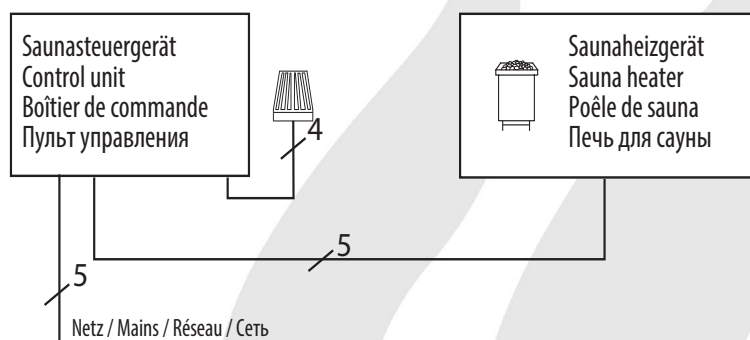

CE IPx4 AR 56
MADE IN GERMANY

Installation

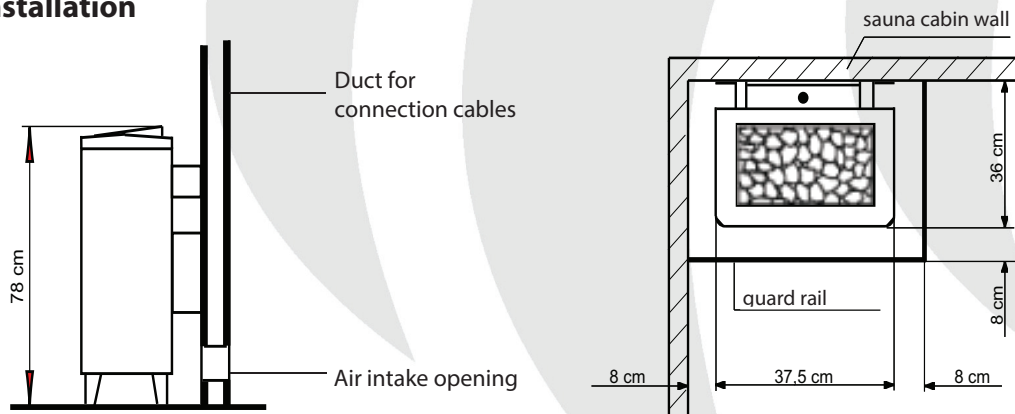

Item no.	Exterior	Power rating	Electrical. Connection	Fuse protection	Heater dimensions H/W/D cm	For cabin size	Minimum dimensions of air intake and exhaust vents	Weight without stones without package	Stone filling	Connecting cable main - control unit in mm ²	Connecting cable control unit - heater in mm ²	Power extension necessary	For operation with control units
94.5684	Anthracite pearl effect	6,0 kW	3N AC 50 Hz 400 V	3 x 16 A	78/ 37,5 / 36	6 - 8 m ³	35 x 4 cm	11,0 kg	18 kg	5 x 2,5 mm ²	5 x 1,5 mm ²	no	ECON D1, D2, D3 EMOTEC DC9000 / DLF EMOTEC D EmoTouch II Plus
94.5685		7,5 kW				7 - 10 m ³	35 x 5 cm						
94.5686		9,0 kW				9 - 14 m ³	35 x 6 cm						

All cross sections of a line are minimum diameters in mm² (Copper line)

29343839en 39.13

