



8
years
warranty*

EOS Vision

Sauna heater for private and commercial saunas. Floor-standing model.

Exclusive, luxury class sauna heater for the dry Finnish sauna. The unusual, futuristic “broken line” design makes EOS Vision to the absolute highlight in any sauna.

The extravagant design is perfectly completed with the stylish base made of solid natural granite and an innovative safety guard rail made of layered stainless steel.

Advantages and benefits:

- Outstanding futuristic “broken line” design.
- Base cut of natural polished granite. Choice of 3 styles.
- Two alternative designs: Vision and Vision Stone with additional granite strips along the top of the heater.
- Finest craftsmanship, each piece individually crafted to order.
- Durable, thoroughly tested stainless steel construction.
- Ideal for central position or installation in front of glass panels.
- Innovative safety guard rail of stainless steel (optional).
- Outstanding 8 years warranty incl. heating elements*.
- Made in Germany quality from EOS.

Specifications:

Outer shell:	Matt black stainless steel, polished stainless steel side strips
Inner shell & rock store:	Stainless steel
Base plate:	Polished granite with steel frame
Power range:	9.0 10.0 12.0 kW 15.0 kW
Power supply:	400 V 3N ~ 50 Hz
Stone volume:	~40 kg, included in delivery
Dimension (H x W x D):	95 x 60 x 60 cm
Installation:	Floor-standing (free standing)



Impala Nero Styling



Giallo Veneziano Styling



Silver Wave Styling


CE UK
CA IPx4

Made in Germany




Connection diagram

9 - 10 kW | 12 - 15 kW*

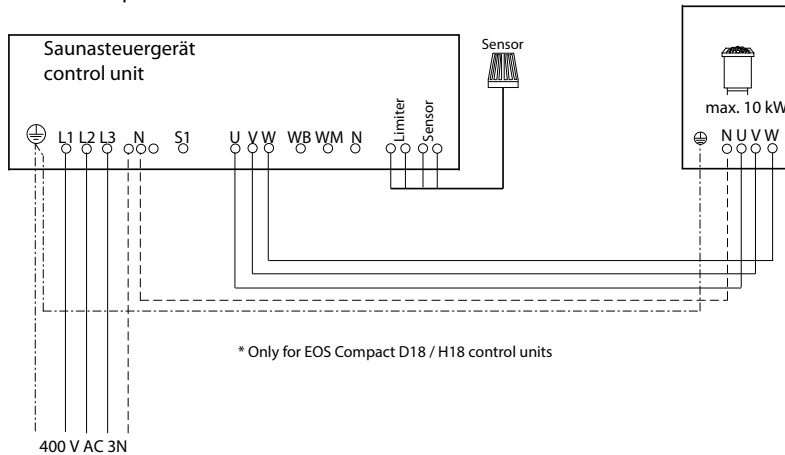

12 - 15 kW**

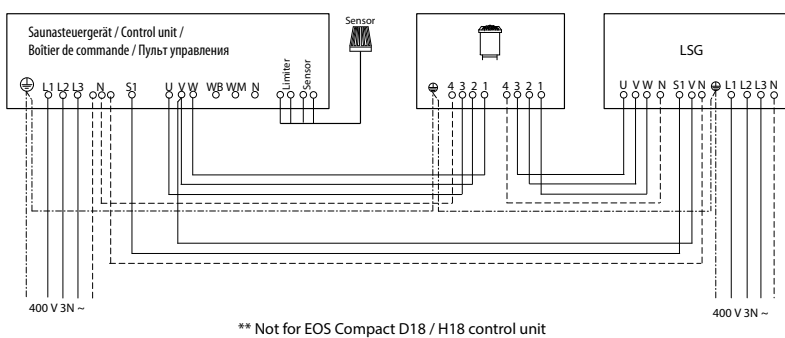



Technical specifications

Power	Electrical connection	Connection mains - control unit	Connection control unit - heater	Connection mains - LSG	Connection LSG - heater	Connection control unit - LSG unit
9,0 kW	400 V 3N ~ 50 Hz	5 x 2,5 mm ² (5 x 4 mm ² for Compact D18)	5 x 1,5 mm ² (5 x 4 mm ² for Compact D18)	5 x 2,5 mm ²	5 x 1,5 mm ²	4 x 1,5 mm ²
10,0 kW						
12,0 kW						
15,0 kW						

All cross sections of connection cables are minimum diameters in mm² (copper wire).

Power	Fuse protection control unit	Fuse protection LSG unit	Dimensions H/W/D, in cm	For sauna cabin size	Min. size air inlet and outlet	Weight without rocks	Stone filling	Power extension	Suitable control units
9,0 kW	3 x 16 A	—	95 / 60 / 60	9 - 14 m³	35 x 5 cm	Vision 89,5 kg Vision Stone 91 kg	~40 kg, caliber 50-100	—	Econ Compact EmoTec EmoStyle EmoTouch
10,0 kW				11 - 15 m³	35 x 6 cm				
12.0 kW	3 x 16 A (3 x 35 A bei Compact D18)	3 x 16 A		14 - 18 m³	35 x 7 cm			LSG 10 (except Compact D18)	
15.0 kW				18 - 25 m³	35 x 9 cm				

Minimum clearances

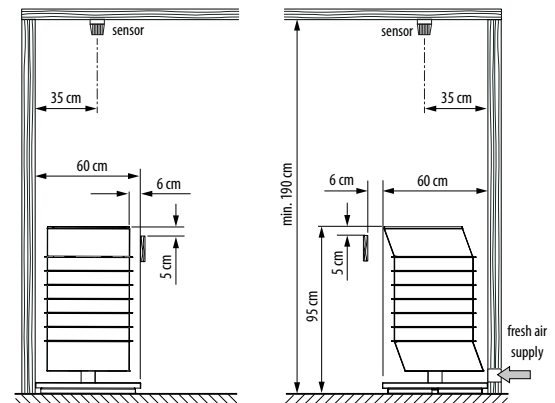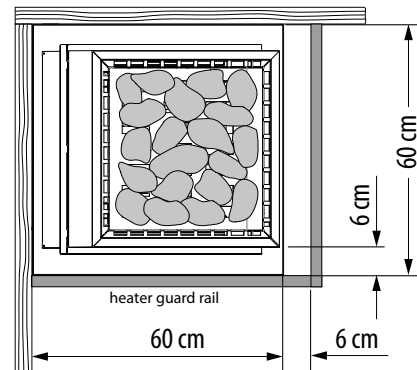

Options and accessories

Modell	Item no.
Brackets for safety guard rail	94 8104
Safety guard rail, stainless steel	94 8105
Sauna stones 50-100 mm, 20 kg	94 7336
Dark sauna stones 50-100 mm, 20 kg	94 7911
White sauna stones 50-80 mm, 10 kg	94 7698
EOSafe L safety system	94 8916