


Sauna heater Bi-O-Max


The heater with the unlimited possibilities of theme saunas!

- Outer shell : anthracite pearl effect
- Stone basket: with air entry openings above the heating elements
- Electrical connection box: galvanized steel plate
- Stone filling: 60 kg incl.
- Service friendly unit assembly system
- Optimized ratio of radiation heat and convection achieved by matching stone quantity.

Connection diagram

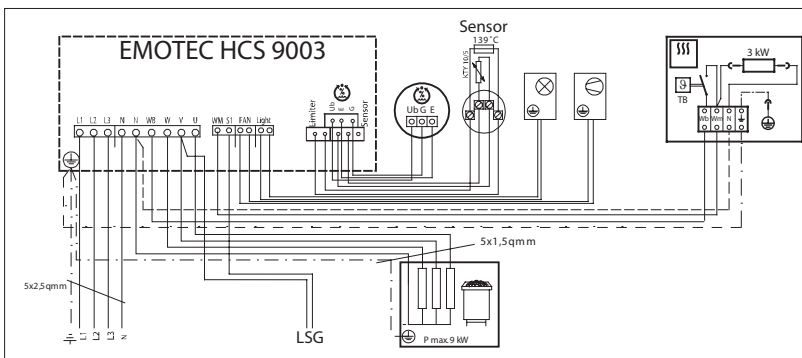

CE D'E GS IP x4 AR56
MADE IN GERMANY

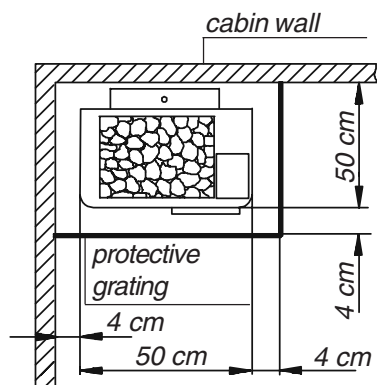

Art.-No	Capacity kW	Vaporizer capacity kW	electrical connection	Installation dimensions H/W/D cm	For cabin size m ³	Minimum dimensions of air intake and exhaust vents	Weight without package	Connecting cable control unit - heater	Power switchgear needed	For operation with control units
94.2317	9	1,5	400 V 3N AC 50 Hz	90/50/50	10 - 14 m ³	35 x 6 cm *	49kg	1 x 5G1,5 +1 x 4G1,5	no**	ECON H1 ECON H2S EMOTEC H9003 EMOTEC HCS9003 **or EMOTEC HIC75 together with power switch gear
94.2318	12	2			14 - 18 m ³	35 x 7 cm *		2 x 5G1,5 +1 x 4G1,5	yes	
94.3922	15	2			18 - 25 m ³	35 x 9 cm *		2 x 5G2,5 +1 x 4G1,5	yes	

*) or according to cabin producer's specification

Subject to technical modifications