



Technical data sheet

EOS Stone S25

Sauna heater for domestic and commercial saunas. Floor-standing model.

Exclusive sauna heater for the dry Finnish sauna in distinctive design with the massive soap-stone front. Thanks to the flat rear wall with the recessed terminal box this heater is great for installation in front of glass walls.

EOS Stone S25 can be alternatively selected also with the integrated vaporizer.

Your advantages:

- Exclusive design with the massive soap-stone front and anthracite pearl effect coated side panels.
- Durable, long-lasting construction, all made of stainless steel.
- Large 25 kg rock store for optimal heat storage and effective water evaporation.
- Also available as "Black Line Edition" with matt black finish.
- Slim, space-saving construction - only 40 x 38,5 cm size.
- Easy to service, rock store above heating elements.
- Made in Germany quality from EOS.

Specifications:


Outer shell:	Stainless steel, with anthracite pearl-effect finish or matt black finish
Front:	Massive natural soap-stone
Inner shell:	Stainless steel
Rock store:	Stainless steel, above heating elements
Terminal box:	Stainless steel, recessed in rear wall
Power range:	7,5 and 9,0 kW
Power supply:	400 V 3N AC 50 Hz
Dimensions:	75 x 40 x 38,5 cm
Stone filling:	25 kg, incl. in delivery
Installation:	Floor-standing




ERC CE IPx4 MADE IN GERMANY 

Connection diagram


7,5 - 9,0 kW

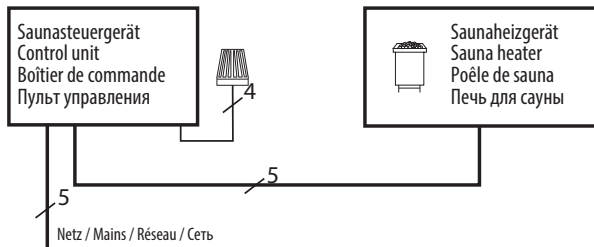

Connection example for EOS EmoTec / EOS EmoStyle / EOS EmoTouch control unit

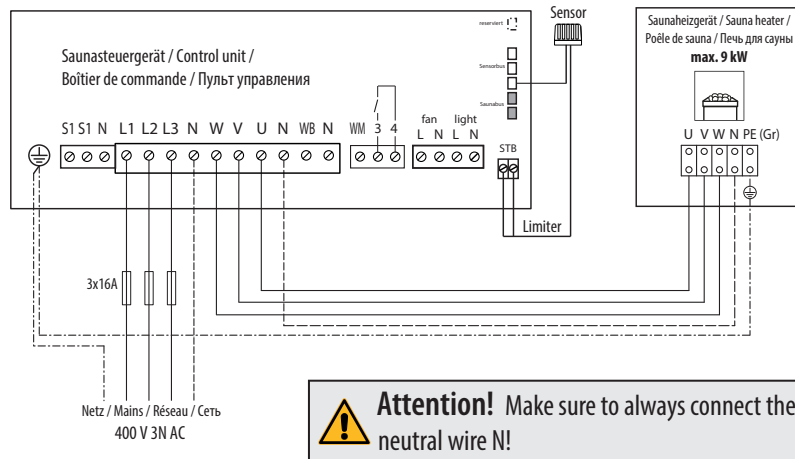

Minimum clearances

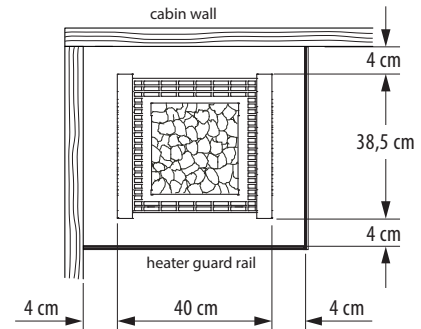

Minimal inner sauna cabin height 190 cm.

Suitable control units

Model	Item no.
EOS Econ D1	94.6136
EOS Econ D2	94.6138
EOS Econ D3	94.6140
EOS Econ D4	94.5842
EOS EmoTec D series	
EOS EmoStyle D / Hi series	
EOS EmoTouch 3 series	

Technical specifications

Power	Electrical connection	Connection mains - control unit	Connection control unit - heater
7.5 kW	400 V 3N AC 50 Hz	5 x 2.5 mm ²	5 x 1.5 mm ²
9.0 kW			

All cross sections of connection cables are minimum diameters in mm² (copper wire).

Spare heating elements

Description	Item no.
For 7.5 kW (5 x 1500 W)	2000.8085
For 9.0 kW (6 x 1500 W)	2000.8085

Item no.	Power	Design	Fuse protection control unit	Dimensions H/W/D, in cm	For sauna cabin size	Min. size air inlet and outlet	Weight without rocks	Stone filling	Power extension required
94.4582 / 7376*	7.5 kW	Anthracite pearl / soap stone front side	3 x 16 A	75 / 40 / 38,5	8 - 12 m ³	35 x 5 cm	50 kg	~25 kg	no
94.4583 / 7377*	9.0 kW				10 - 14 m ³	35 x 6 cm			

*matt black finish