



Technical data sheet

# EOS Stone S25 Vapor

**Sauna heater for domestic and commercial saunas. Floor-standing model.**

Exclusive sauna heater with integrated vaporizer for dry and humid sauna operation. The front side is fitted with massive soap-stone panels which not only provide this model its unique appearance, but also store heat and become a source of a gentle, comforting warmth radiation.

Thanks to the flat rear wall with recessed terminal box this furnace can also be installed in front of glass surfaces.

## Your advantages:

- Exclusive design with the massive soap-stone front and anthracite pearl effect coated side panels.
- Also available as "Black Line Edition" with matt black finish.
- Large 25 kg rock store for optimal heat storage and effective water evaporation.
- Built-in 2 kW vaporizer with essences and herbs holder.
- Easy to service, rock store above heating elements.
- Made in Germany quality from EOS.

## Specifications:


Outer shell:	Stainless steel, with anthracite pearl-effect finish or matt black finish
Front:	Massive natural soap-stone
Inner shell:	Stainless steel
Rock store:	Stainless steel, above heating elements
Terminal box:	Stainless steel, recessed in rear wall
Vaporizer:	2 kW 230 V, manual filling, 5 l tank
Power range:	7,5 and 9,0 kW
Power supply:	400 V 3N AC 50 Hz
Dimensions:	75 x 44 x 38,5 cm
Stone filling:	25 kg, incl. in delivery
Installation:	Floor-standing




CE IPx4 MADE IN GERMANY

### Connection diagram

7,5 - 9,0 kW

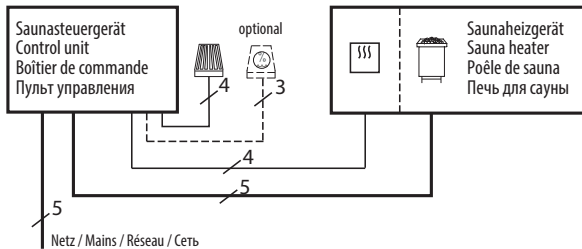

Connection example for EOS EmoTec / EOS EmoStyle / EOS EmoTouch 3 control unit

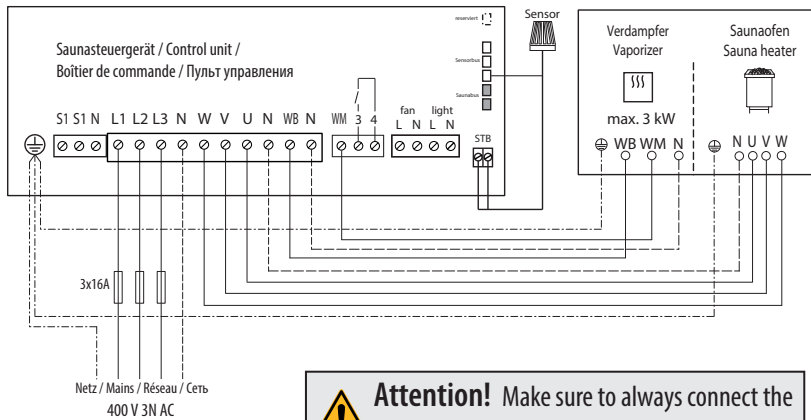


**Attention!** Make sure to always connect the neutral wire N!

### Technical specifications

Power	Electrical connection	Connection mains - control unit	Connection control unit - heater
7.5 kW	400 V 3N AC 50 Hz	5 x 2.5 mm <sup>2</sup>	5 x 1.5 mm <sup>2</sup> (heater)
9.0 kW			4 x 1,5 mm <sup>2</sup> (vaporizer)

All cross sections of connection cables are minimum diameters in mm<sup>2</sup> (copper wire).

### Minimum clearances

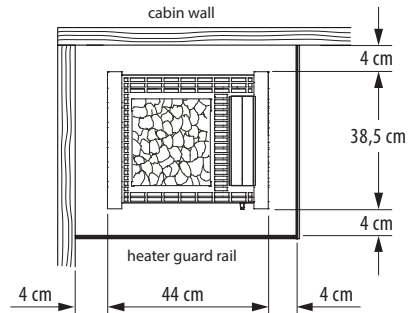

Minimal inner sauna cabin height 190 cm.

### Suitable control units

Model	Item no.
EOS Econ H1	94.6137
EOS Econ H2	94.6139
EOS Econ H3	94.6141
EOS Econ H4	94.5843
EOS EmoTec H series	
EOS EmoStyle H / Hi series	
EOS EmoTouch 3 series	

### Spare heating elements

Description	Item no.
For 7.5 kW (5 x 1500 W)	2000.8085
For 9.0 kW (6 x 1500 W)	2000.8085
For Vaporizer (1x 2000 W)	2001.4330

Item no.	Power	Vaporizer	Design	Fuse protection control unit	Dimensions H/W/D, in cm	For sauna cabin size	Min. size air inlet and outlet	Weight without rocks	Stone filling	Power extension required
94.4584 / 94.7378*	7.5 kW	2,0 kW ca. 5 l	Anthracite pearl / soap-stone front side	3 x 16 A	75 / 44 / 38,5	8 - 12 m <sup>3</sup>	35 x 5 cm	55 kg	~25 kg	no
94.4585 / 94.7378*						9.0 kW	10 - 14 m <sup>3</sup>			

\*matt black finish